


## DMX MP3 VMusic2 Player

## Overview

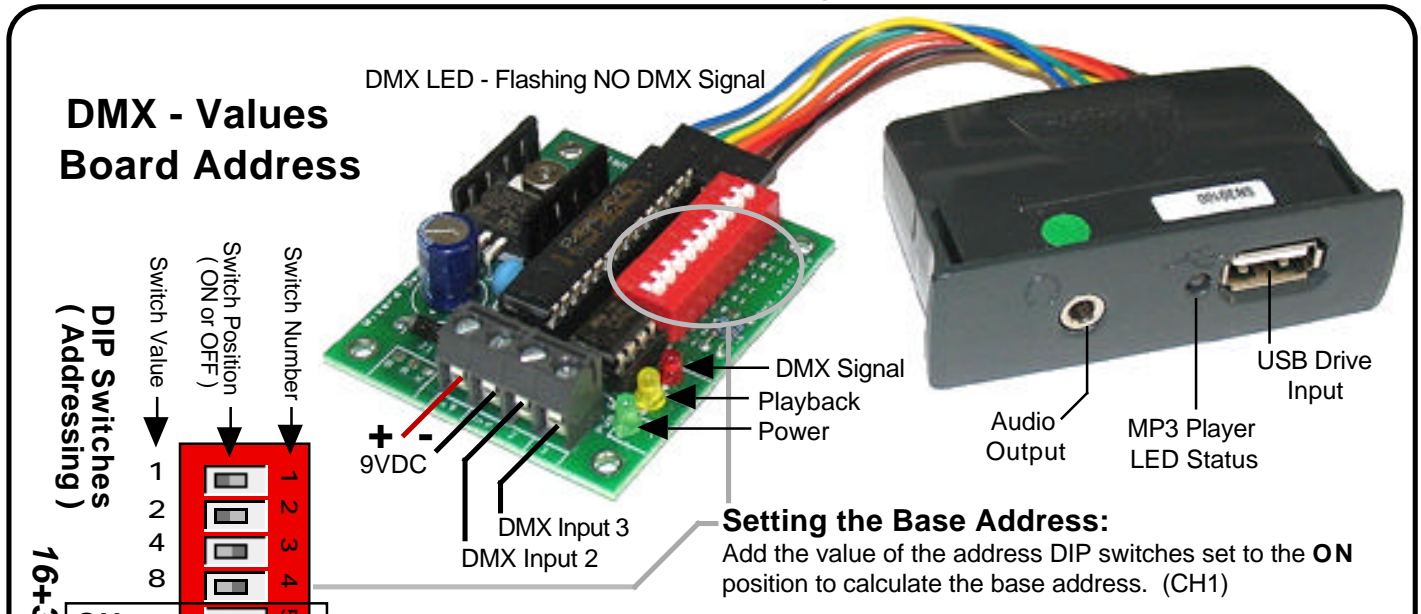

**DMX - Values Board Address**

DMX LED - Flashing NO DMX Signal

DMX Signal  
Playback Power  
+ 9VDC  
DMX Input 3  
DMX Input 2

Audio Output  
MP3 Player LED Status  
USB Drive Input

**Setting the Base Address:**  
Add the value of the address DIP switches set to the ON position to calculate the base address. (CH1)

Example: DIP switches 5 and 6 set to ON position, the base address is now 48, (16+32) this setting is used to determine the starting address output of Channel-1, the next Channel would be address 49 for Channel-2, and the next 50 for Channel-3, 51 for Channel-4. (3 or 4 Channels used)

**The DMX-VMusic2 Interface requires 3 or 4 consecutive control channels.**

SW1 SW10  
Address 0 is treated as being 1

CHANNEL-1 Playback Function	
Value	Function
0-63 =	Stop Audio Playback
64-191 =	Start Play or resume currently track
192-255 =	Pause Audio Playback, then 64-191

CHANNEL-2 Audio Track Numbers	
Value	Audio Tracks
0-7 =	001.MP3 (Sound FX Track -1)
8-15 =	002.MP3 (Sound FX Track- 2)
16-23 =	003.MP3 (Sound FX Track- 3)
...	...
72-79 =	010.MP3 (Sound FX Track- 10)
80-87 =	018.MP3 (Sound FX Track- 11)
...	...
152-159 =	020.MP3 (Sound FX Track- 20)
248-255 =	032.MP3 (Sound FX Track- 32)

CHANNEL-3 Volume ( L/R or L)	
Value	Operation: L/R-Volume
0-255 (0 is Mute)	<ul style="list-style-type: none"> <li>• If SW10 is Set to ON</li> </ul> Volume for both the Left and Right Audio Channels (Off - Full)
Value	Operation: L-Volume
0-255 (0 is Mute)	<ul style="list-style-type: none"> <li>• If SW10 is Set to OFF</li> </ul> Volume for Left Audio Channel

CHANNEL-4 Volume (R)	
Value	Operation: R-Volume
0-255 (0 is Mute)	<ul style="list-style-type: none"> <li>• If SW10 is Set to OFF</li> </ul> Volume for Right Audio Channel

16+32 = 48

1 2 4 8 16 32 64 128 256

Switch Value (Addressing)

Switch Position (ON or OFF)

Switch Number

1 2 3 4 5 6 7 8 9 10

OFF ON

## DMX Audio Track Chart

### DMX Command Values

DMX CH1	0 - 63
DMX CH1	64 - 191
DMX CH1	192 - 255
DMX CH2	0 - 255
DMX CH3 - 4	0 - 255

### Playback Operation

Stop Playback
Play or Resume Currently Selected Track
Pause Playback
Sound Files= 001.MP3 to 032.MP3 Files
Volume Control L/R or L and R



**DMX- MP3 Player**

## DMX Control Command Syntax

Audio Track	DMX Command Value	Track Name	Audio Description
SFX Track - 1	0 - 7	001.MP3	"This is Channel 1 " - Audio
SFX Track - 2	8 - 15	002.MP3	
SFX Track - 3	16 - 23	003.MP3	
SFX Track - 4	24 - 31	004.MP3	
SFX Track - 5	32 - 39	005.MP3	
SFX Track - 6	40 - 47	006.MP3	
SFX Track - 7	48 - 55	007.MP3	
SFX Track - 8	56 - 63	008.MP3	
SFX Track - 9	64 - 71	009.MP3	
SFX Track -10	72 - 79	010.MP3	
SFX Track -11	80 - 87	011.MP3	
SFX Track -12	88 - 95	012.MP3	
SFX Track -13	96 - 103	013.MP3	
SFX Track -14	104 - 111	014.MP3	
SFX Track -15	112 - 119	015.MP3	
SFX Track- 16	120 - 127	016.MP3	
SFX Track -17	128 - 135	017.MP3	
SFX Track -18	136 - 143	018.MP3	
SFX Track -19	144 - 151	019.MP3	
SFX Track -20	152 - 159	020.MP3	
SFX Track- 21	160 - 167	021.MP3	
SFX Track- 22	168 - 175	022.MP3	
SFX Track- 23	176 - 183	023.MP3	
SFX Track- 24	184 - 191	024.MP3	
SFX Track -25	192 - 199	025.MP3	
SFX Track- 26	200 - 207	026.MP3	
SFX Track- 27	208 - 215	027.MP3	
SFX Track- 28	216 - 223	028.MP3	
SFX Track- 29	224 - 231	029.MP3	
SFX Track -30	232 - 239	030.MP3	
SFX Track- 31	240 - 247	031.MP3	
SFX Track- 32	248 - 255	032.MP3	"This is Channel 32 " - Audio


### Board Base Address Range

**1 - 510**

**Address 0 is treated as 1**

Copyright © 2010 Blue Point Engineering,  
All Rights Reserved

**DIP Switches  
(Addressing)**

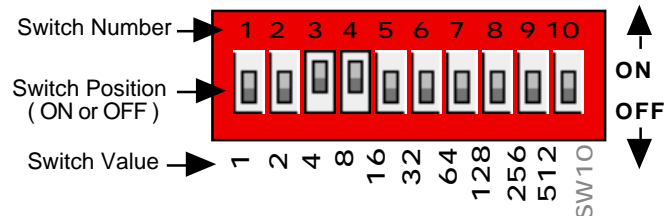

Custom Equipment, Unique Electronic Products

Blue Point Engineering

Phone (303) 651-3794 (MST)  
www.BPEolutions.com



## DMX-VMusic2 Interface

### DMX Address Chart

### DMX- MP3 Player

Ch - Switches	Ch - Switches	Ch - Switches	Ch - Switches	Ch - Switches
1 = 1 <b>ON</b>	53 = 1, 3, 5, 6 <b>ON</b>	105 = 1, 4, 6, 7 <b>ON</b>	157 = 1, 3, 4, 5, 8 <b>ON</b>	209 = 1, 5, 7, 8 <b>ON</b>
2 = 2	54 = 2, 3, 5, 6	106 = 2, 4, 6, 7	158 = 2, 3, 4, 5, 8	210 = 2, 5, 7, 8
3 = 1, 2	55 = 1, 2, 3, 5, 6	107 = 1, 2, 4, 6, 7	159 = 1, 2, 3, 4, 5, 8	211 = 1, 2, 5, 7, 8
4 = 3	56 = 4, 5, 6	108 = 3, 4, 6, 7	160 = 6, 8	212 = 3, 5, 7, 8
5 = 1, 3	57 = 1, 4, 5, 6	109 = 1, 3, 4, 6, 7	161 = 1, 6, 8	213 = 1, 3, 5, 7, 8
6 = 2, 3	58 = 2, 4, 5, 6	110 = 2, 3, 4, 6, 7	162 = 2, 6, 8	214 = 2, 3, 5, 7, 8
7 = 1, 2, 3	59 = 1, 2, 4, 5, 6	111 = 1, 2, 3, 4, 6, 7	163 = 1, 2, 6, 8	215 = 1, 2, 3, 5, 7, 8
8 = 4	60 = 3, 4, 5, 6	112 = 5, 6, 7	164 = 3, 6, 8	216 = 4, 5, 7, 8
9 = 1, 4	61 = 1, 3, 4, 5, 6	113 = 1, 5, 6, 7	165 = 1, 3, 6, 8	217 = 1, 4, 5, 7, 8
10 = 2, 4	62 = 2, 3, 4, 5, 6	114 = 2, 5, 6, 7	166 = 2, 3, 6, 8	218 = 2, 4, 5, 7, 8
11 = 1, 2, 4	63 = 1, 2, 3, 4, 5, 6	115 = 1, 2, 5, 6, 7	167 = 1, 2, 3, 6, 8	219 = 1, 2, 4, 5, 7, 8
12 = 3, 4	64 = 7	116 = 3, 5, 6, 7	168 = 4, 6, 8	220 = 3, 4, 5, 7, 8
13 = 1, 3, 4	65 = 1, 7	117 = 1, 3, 5, 6, 7	169 = 1, 4, 6, 8	221 = 1, 3, 4, 5, 7, 8
14 = 2, 3, 4	66 = 2, 7	118 = 2, 3, 5, 6, 7	170 = 2, 4, 6, 8	222 = 2, 3, 4, 5, 7, 8
15 = 1, 2, 3, 4	67 = 1, 2, 7	119 = 1, 2, 3, 5, 6, 7	171 = 1, 2, 4, 6, 8	223 = 1, 2, 3, 4, 5, 7, 8
16 = 5	68 = 3, 7	120 = 4, 5, 6, 7	172 = 3, 4, 6, 8	224 = 6, 7, 8
17 = 1, 5	69 = 1, 3, 7	121 = 1, 4, 5, 6, 7	173 = 1, 3, 4, 6, 8	225 = 1, 6, 7, 8
18 = 2, 5	70 = 2, 3, 7	122 = 2, 4, 5, 6, 7	174 = 2, 3, 4, 6, 8	226 = 2, 6, 7, 8
19 = 1, 2, 5	71 = 1, 2, 3, 7	123 = 1, 2, 4, 5, 6, 7	175 = 1, 2, 3, 4, 6, 8	227 = 1, 2, 6, 7, 8
20 = 3, 5	72 = 4, 7	124 = 3, 4, 5, 6, 7	176 = 5, 6, 8	228 = 3, 6, 7, 8
21 = 1, 3, 5	73 = 1, 4, 7	125 = 1, 3, 4, 5, 6, 7	177 = 1, 5, 6, 8	229 = 1, 3, 6, 7, 8
22 = 2, 3, 5	74 = 2, 4, 7	126 = 2, 3, 4, 5, 6, 7	178 = 2, 5, 6, 8	230 = 2, 3, 6, 7, 8
23 = 1, 2, 3, 5	75 = 1, 2, 4, 7	127 = 1, 2, 3, 4, 5, 6, 7	179 = 1, 2, 5, 6, 8	231 = 1, 2, 3, 6, 7, 8
24 = 4, 5	76 = 3, 4, 7	128 = 8	180 = 3, 5, 6, 8	232 = 4, 6, 7, 8
25 = 1, 4, 5	77 = 1, 3, 4, 7	129 = 1, 8	181 = 1, 3, 5, 6, 8	233 = 1, 4, 6, 7, 8
26 = 2, 4, 5	78 = 2, 3, 4, 7	130 = 2, 8	182 = 2, 3, 5, 6, 8	234 = 2, 4, 6, 7, 8
27 = 1, 2, 4, 5	79 = 1, 3, 4, 7	131 = 1, 2, 8	183 = 1, 2, 3, 5, 6, 8	235 = 1, 2, 4, 6, 7, 8
28 = 3, 4, 5	80 = 5, 7	132 = 3, 8	184 = 4, 5, 6, 8	236 = 3, 4, 6, 7, 8
29 = 1, 3, 4, 5	81 = 1, 5, 7	133 = 1, 3, 8	185 = 1, 4, 5, 6, 8	237 = 1, 3, 4, 6, 7, 8
30 = 2, 3, 4, 5	82 = 2, 5, 7	134 = 2, 3, 8	186 = 2, 4, 5, 6, 8	238 = 2, 3, 4, 6, 7, 8
31 = 1, 2, 3, 4, 5	83 = 1, 2, 5, 7	135 = 1, 2, 3, 8	187 = 1, 2, 4, 5, 6, 8	239 = 1, 2, 3, 4, 6, 7, 8
32 = 6	84 = 3, 5, 7	136 = 4, 8	188 = 3, 4, 5, 6, 8	240 = 5, 6, 7, 8
33 = 1, 6	85 = 1, 3, 5, 7	137 = 1, 4, 8	189 = 1, 3, 4, 5, 6, 8	241 = 1, 5, 6, 7, 8
34 = 2, 6	86 = 2, 3, 5, 7	138 = 2, 4, 8	190 = 2, 3, 4, 5, 6, 8	242 = 2, 5, 6, 7, 8
35 = 1, 2, 6	87 = 1, 2, 3, 5, 7	139 = 1, 2, 4, 8	191 = 1, 2, 3, 4, 5, 6, 8	243 = 1, 2, 5, 6, 7, 8
36 = 3, 6	88 = 4, 5, 7	140 = 3, 4, 8	192 = 7, 8	244 = 3, 5, 6, 7, 8
37 = 1, 3, 6	89 = 1, 4, 5, 7	141 = 1, 3, 4, 8	193 = 1, 7, 8	245 = 1, 3, 5, 6, 7, 8
38 = 2, 3, 6	90 = 2, 4, 5, 7	142 = 2, 3, 4, 8	194 = 2, 7, 8	246 = 2, 3, 5, 6, 7, 8
39 = 1, 2, 3, 6	91 = 1, 2, 4, 5, 7	143 = 1, 2, 3, 4, 8	195 = 1, 2, 7, 8	247 = 1, 2, 3, 5, 6, 7, 8
40 = 4, 6	92 = 3, 4, 5, 7	144 = 5, 8	196 = 3, 7, 8	248 = 4, 5, 6, 7, 8
41 = 1, 4, 6	93 = 1, 3, 4, 5, 7	145 = 1, 5, 8	197 = 1, 3, 7, 8	249 = 1, 4, 5, 6, 7, 8
42 = 2, 4, 6	94 = 2, 3, 4, 5, 7	146 = 2, 5, 8	198 = 2, 3, 7, 8	250 = 2, 4, 5, 6, 7, 8
43 = 1, 2, 4, 6	95 = 1, 2, 3, 4, 5, 7	147 = 1, 2, 5, 8	199 = 1, 2, 3, 7, 8	251 = 1, 2, 4, 5, 6, 7, 8
44 = 3, 4, 6	96 = 6, 7	148 = 3, 5, 8	200 = 4, 7, 8	252 = 3, 4, 5, 6, 7, 8
45 = 1, 3, 4, 6	97 = 1, 6, 7	149 = 1, 3, 5, 8	201 = 1, 4, 7, 8	253 = 1, 3, 4, 5, 6, 7, 8
46 = 2, 3, 4, 6	98 = 2, 6, 7	150 = 2, 3, 5, 8	202 = 2, 4, 7, 8	254 = 2, 3, 4, 5, 6, 7, 8
47 = 1, 2, 3, 4, 6	99 = 1, 2, 6, 7	151 = 1, 2, 3, 5, 8	203 = 1, 2, 4, 7, 8	255 = 1, 2, 3, 4, 5, 6, 7, 8
48 = 5, 6	100 = 3, 6, 7	152 = 4, 5, 8	204 = 3, 4, 7, 8	256 = 9
49 = 1, 5, 6	101 = 1, 3, 6, 7	153 = 1, 4, 5, 8	205 = 1, 3, 4, 7, 8	257 = 1, 9
50 = 2, 5, 6	102 = 2, 3, 6, 7	154 = 2, 4, 5, 8	206 = 2, 3, 4, 7, 8	258 = 2, 9
51 = 1, 2, 5, 6	103 = 1, 2, 3, 6, 7	155 = 1, 2, 4, 5, 8	207 = 1, 2, 3, 4, 7, 8	259 = 1, 2, 9
52 = 3, 5, 6	104 = 4, 6, 7	156 = 3, 4, 5, 8	208 = 5, 7, 8	260 = 3, 9

Custom Equipment, Unique Electronic Products

Blue Point Engineering

Phone (303) 651-3794 (MST)  
www.BPEsolutions.com

# Address Chart: DMX- MP3 Player Cont.

## Ch - Switches

261 = 1, 3, 9	<b>ON</b>
262 = 2, 3, 9	
263 = 1, 2, 3, 9	
264 = 4, 9	
265 = 1, 4, 9	
266 = 2, 4, 9	
267 = 1, 2, 4, 9	
268 = 3, 4, 9	
269 = 1, 3, 4, 9	
270 = 2, 3, 4, 9	
271 = 1, 2, 3, 4, 9	
272 = 5, 9	
273 = 1, 5, 9	
274 = 2, 5, 9	
275 = 1, 2, 5, 9	
276 = 3, 5, 9	
277 = 1, 3, 5, 9	
278 = 2, 3, 5, 9	
279 = 1, 2, 3, 5, 9	
280 = 4, 5, 9	
281 = 1, 4, 5, 9	
282 = 2, 4, 5, 9	
283 = 1, 2, 4, 5, 9	
284 = 3, 4, 5, 9	
285 = 1, 3, 4, 5, 9	
286 = 2, 3, 4, 5, 9	
287 = 1, 2, 3, 4, 5, 9	
288 = 6, 9	
289 = 1, 6, 9	
290 = 2, 6, 9	
291 = 1, 2, 6, 9	
292 = 3, 6, 9	
293 = 1, 3, 6, 9	
294 = 2, 3, 6, 9	
295 = 1, 2, 3, 6, 9	
296 = 4, 6, 9	
297 = 1, 4, 6, 9	
298 = 2, 4, 6, 9	
299 = 1, 2, 4, 6, 9	
300 = 3, 4, 6, 9	
301 = 1, 3, 4, 6, 9	
302 = 2, 3, 4, 6, 9	
303 = 1, 2, 3, 4, 6, 9	
304 = 5, 6, 9	
305 = 1, 5, 6, 9	
306 = 2, 5, 6, 9	
307 = 1, 2, 5, 6, 9	
308 = 3, 5, 6, 9	
309 = 1, 3, 5, 6, 9	
310 = 2, 3, 5, 6, 9	
311 = 1, 2, 3, 5, 6, 9	
312 = 4, 5, 6, 9	
313 = 1, 4, 5, 6, 9	
314 = 2, 4, 5, 6, 9	
315 = 1, 2, 4, 5, 6, 9	
316 = 3, 4, 5, 6, 9	
317 = 1, 3, 4, 5, 6, 9	
318 = 2, 3, 4, 5, 6, 9	
319 = 1, 2, 3, 4, 5, 6, 9	
320 = 7, 9	
321 = 1, 7, 9	

## Ch - Switches

322 = 2, 7, 9	<b>ON</b>
323 = 1, 2, 7, 9	
324 = 3, 7, 9	
325 = 1, 3, 7, 9	
326 = 2, 3, 7, 9	
327 = 1, 2, 3, 7, 9	
328 = 4, 7, 9	
329 = 1, 4, 7, 9	
330 = 2, 4, 7, 9	
331 = 1, 2, 4, 7, 9	
332 = 3, 4, 7, 9	
333 = 1, 3, 4, 7, 9	
334 = 2, 3, 4, 7, 9	
335 = 1, 2, 3, 4, 7, 9	
336 = 5, 7, 9	
337 = 1, 5, 7, 9	
338 = 2, 5, 7, 9	
339 = 1, 2, 5, 7, 9	
340 = 3, 5, 7, 9	
341 = 1, 3, 5, 7, 9	
342 = 2, 3, 5, 7, 9	
343 = 1, 2, 3, 5, 7, 9	
344 = 4, 5, 7, 9	
345 = 1, 4, 5, 7, 9	
346 = 2, 4, 5, 7, 9	
347 = 1, 2, 4, 5, 7, 9	
348 = 3, 4, 5, 7, 9	
349 = 1, 3, 4, 5, 7, 9	
350 = 2, 3, 4, 5, 7, 9	
351 = 1, 2, 3, 4, 5, 7, 9	
352 = 6, 7, 9	
353 = 1, 6, 7, 9	
354 = 2, 6, 7, 9	
355 = 1, 2, 6, 7, 9	
356 = 3, 6, 7, 9	
357 = 1, 3, 6, 7, 9	
358 = 2, 3, 6, 7, 9	
359 = 1, 2, 3, 6, 7, 9	
360 = 4, 6, 7, 9	
361 = 1, 4, 6, 7, 9	
362 = 2, 4, 6, 7, 9	
363 = 1, 2, 4, 6, 7, 9	
364 = 3, 4, 6, 7, 9	
365 = 1, 3, 4, 6, 7, 9	
366 = 2, 3, 4, 6, 7, 9	
367 = 1, 2, 3, 4, 6, 7, 9	
368 = 5, 6, 7, 9	
369 = 1, 5, 6, 7, 9	
370 = 2, 5, 6, 7, 9	
371 = 1, 2, 5, 6, 7, 9	
372 = 3, 5, 6, 7, 9	
373 = 1, 3, 5, 6, 7, 9	
374 = 2, 3, 5, 6, 7, 9	
375 = 1, 2, 3, 5, 6, 7, 9	
376 = 4, 5, 6, 7, 9	
377 = 1, 4, 5, 6, 7, 9	
378 = 2, 4, 5, 6, 7, 9	
379 = 1, 2, 4, 5, 6, 7, 9	
380 = 3, 4, 5, 6, 7, 9	
381 = 1, 3, 4, 5, 6, 7, 9	
382 = 2, 3, 4, 5, 6, 7, 9	

## Ch - Switches


383 = 1, 2, 3, 4, 5, 6, 7, 9	
384 = 8, 9	<b>ON</b>
385 = 1, 8, 9	
386 = 2, 8, 9	
387 = 1, 2, 8, 9	
388 = 3, 8, 9	
389 = 1, 3, 8, 9	
390 = 2, 3, 8, 9	
391 = 1, 2, 3, 8, 9	
392 = 4, 8, 9	
393 = 1, 4, 8, 9	
394 = 2, 4, 8, 9	
395 = 1, 2, 4, 8, 9	
396 = 3, 4, 8, 9	
397 = 1, 3, 4, 8, 9	
398 = 2, 3, 4, 8, 9	
399 = 1, 2, 3, 4, 8, 9	
400 = 5, 8, 9	
401 = 1, 5, 8, 9	
402 = 2, 5, 8, 9	
403 = 1, 2, 5, 8, 9	
404 = 3, 5, 8, 9	
405 = 1, 3, 5, 8, 9	
406 = 2, 3, 5, 8, 9	
407 = 1, 2, 3, 5, 8, 9	
408 = 4, 5, 8, 9	
409 = 1, 4, 5, 8, 9	
410 = 2, 4, 5, 8, 9	
411 = 1, 2, 4, 5, 8, 9	
412 = 3, 4, 5, 8, 9	
413 = 1, 3, 4, 5, 8, 9	
414 = 2, 3, 4, 5, 8, 9	
415 = 1, 2, 3, 4, 5, 8, 9	
416 = 6, 8, 9	
417 = 1, 6, 8, 9	
418 = 2, 6, 8, 9	
419 = 1, 2, 6, 8, 9	
420 = 3, 6, 8, 9	
421 = 1, 3, 6, 8, 9	
422 = 2, 3, 6, 8, 9	
423 = 1, 2, 3, 6, 8, 9	
424 = 4, 6, 8, 9	
425 = 1, 4, 6, 8, 9	
426 = 2, 4, 6, 8, 9	
427 = 1, 2, 4, 6, 8, 9	
428 = 3, 4, 6, 8, 9	
429 = 1, 3, 4, 6, 8, 9	
430 = 2, 3, 4, 6, 8, 9	
431 = 1, 2, 3, 4, 6, 8, 9	
432 = 5, 6, 8, 9	
433 = 1, 5, 6, 8, 9	
434 = 2, 5, 6, 8, 9	
435 = 1, 2, 5, 6, 8, 9	
436 = 3, 5, 6, 8, 9	
437 = 1, 3, 5, 6, 8, 9	
438 = 2, 3, 5, 6, 8, 9	
439 = 1, 2, 3, 5, 6, 8, 9	
440 = 4, 5, 6, 8, 9	
441 = 1, 4, 5, 6, 8, 9	
442 = 2, 4, 5, 6, 8, 9	
443 = 1, 2, 4, 5, 6, 8, 9	

## Ch - Switches

444 = 3, 4, 5, 6, 8, 9	<b>ON</b>
445 = 1, 3, 4, 5, 6, 8, 9	
446 = 2, 3, 4, 5, 6, 8, 9	
447 = 1, 2, 3, 4, 5, 6, 8, 9	
448 = 7, 8, 9	
449 = 1, 7, 8, 9	
450 = 2, 7, 8, 9	
451 = 1, 2, 7, 8, 9	
452 = 3, 7, 8, 9	
453 = 1, 3, 7, 8, 9	
454 = 2, 3, 7, 8, 9	
455 = 1, 2, 3, 7, 8, 9	
456 = 4, 7, 8, 9	
457 = 1, 4, 7, 8, 9	
458 = 2, 4, 7, 8, 9	
459 = 1, 2, 4, 7, 8, 9	
460 = 3, 4, 7, 8, 9	
461 = 1, 3, 4, 7, 8, 9	
462 = 2, 3, 4, 7, 8, 9	
463 = 1, 2, 3, 4, 7, 8, 9	
464 = 5, 7, 8, 9	
465 = 1, 5, 7, 8, 9	
466 = 2, 5, 7, 8, 9	
467 = 1, 2, 5, 7, 8, 9	
468 = 3, 5, 7, 8, 9	
469 = 1, 3, 5, 7, 8, 9	
470 = 2, 3, 5, 7, 8, 9	
471 = 1, 2, 3, 5, 7, 8, 9	
472 = 4, 5, 7, 8, 9	
473 = 1, 4, 5, 7, 8, 9	
474 = 2, 4, 5, 7, 8, 9	
475 = 1, 2, 4, 5, 7, 8, 9	
476 = 3, 4, 5, 7, 8, 9	
477 = 1, 3, 4, 5, 7, 8, 9	
478 = 2, 3, 4, 5, 7, 8, 9	
479 = 1, 2, 3, 4, 5, 7, 8, 9	
480 = 6, 7, 8, 9	
481 = 1, 6, 7, 8, 9	
482 = 2, 6, 7, 8, 9	
483 = 1, 2, 6, 7, 8, 9	
484 = 3, 6, 7, 8, 9	
485 = 1, 3, 6, 7, 8, 9	
486 = 2, 3, 6, 7, 8, 9	
487 = 1, 2, 3, 6, 7, 8, 9	
488 = 4, 6, 7, 8, 9	
489 = 1, 4, 6, 7, 8, 9	
490 = 2, 4, 6, 7, 8, 9	
491 = 1, 2, 4, 6, 7, 8, 9	
492 = 3, 4, 6, 7, 8, 9	
493 = 1, 3, 4, 6, 7, 8, 9	
494 = 2, 3, 4, 6, 7, 8, 9	
495 = 1, 2, 3, 4, 6, 7, 8, 9	
496 = 5, 6, 7, 8, 9	
497 = 1, 5, 6, 7, 8, 9	
498 = 2, 5, 6, 7, 8, 9	
499 = 1, 2, 5, 6, 7, 8, 9	
500 = 3, 5, 6, 7, 8, 9	
501 = 1, 3, 5, 6, 7, 8, 9	
502 = 2, 3, 5, 6, 7, 8, 9	
503 = 1, 2, 3, 5, 6, 7, 8, 9	
504 = 4, 5, 6, 7, 8, 9	

## Ch - Switches

505 = 1, 4, 5, 6, 7, 8, 9	<b>ON</b>
506 = 2, 4, 5, 6, 7, 8, 9	
507 = 1, 2, 4, 5, 6, 7, 8, 9	
508 = 3, 4, 5, 6, 7, 8, 9	
509 = 1, 3, 4, 5, 6, 7, 8, 9	
510 = 2, 3, 4, 5, 6, 7, 8, 9	
511	<b>NOT AVAILABLE</b>
512	

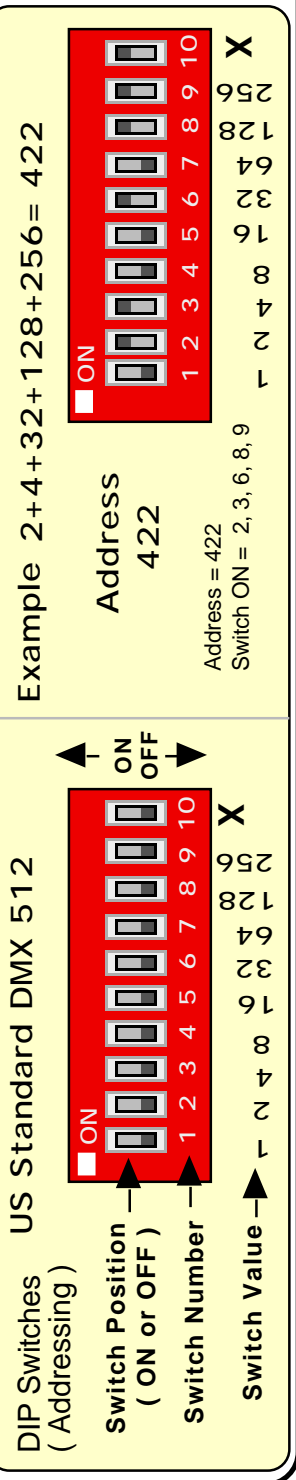

## Notes / Worksheet

## DMX-VMusic2 Interface

Audio Track	DMX Value	Track Name	Audio Description
SFX Track - 1	0 - 7	001.MP3	
SFX Track - 2	8 - 15	002.MP3	
SFX Track - 3	16 - 23	003.MP3	
SFX Track - 4	24 - 31	004.MP3	
SFX Track - 5	32 - 39	005.MP3	
SFX Track - 6	40 - 47	006.MP3	
SFX Track - 7	48 - 55	007.MP3	
SFX Track - 8	56 - 63	008.MP3	
SFX Track - 9	64 - 71	009.MP3	
SFX Track -10	72 - 79	010.MP3	
SFX Track -11	80 - 87	011.MP3	
SFX Track -12	88 - 95	012.MP3	
SFX Track -13	96 - 103	013.MP3	
SFX Track -14	104 - 111	014.MP3	
SFX Track -15	112 - 119	015.MP3	
SFX Track -16	120 - 127	016.MP3	
SFX Track -17	128 - 135	017.MP3	
SFX Track -18	136 - 143	018.MP3	
SFX Track -19	144 - 151	019.MP3	
SFX Track -20	152 - 159	020.MP3	
SFX Track -21	160 - 167	021.MP3	
SFX Track -22	168 - 175	022.MP3	
SFX Track -23	176 - 183	023.MP3	
SFX Track -24	184 - 191	024.MP3	
SFX Track -25	192 - 199	025.MP3	
SFX Track -26	200 - 207	026.MP3	
SFX Track -27	208 - 215	027.MP3	
SFX Track -28	216 - 223	028.MP3	
SFX Track -29	224 - 231	029.MP3	
SFX Track -30	232 - 239	030.MP3	
SFX Track -31	240 - 247	031.MP3	
SFX Track -32	248 - 255	032.MP3	

**Base Address = 1- 510**

See Address Chart for Switch Settings

**Base Board Address =** \_\_\_\_\_


DMX Channel-1 Address = \_\_\_\_\_

DMX Channel-2 Address = \_\_\_\_\_

DMX Channel-3 Address = \_\_\_\_\_

DMX Channel-4 Address = \_\_\_\_\_

Comments: \_\_\_\_\_

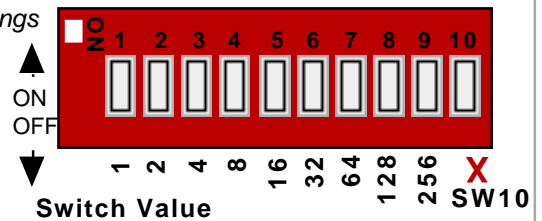

Copyright © 2010 Blue Point Engineering, All Rights Reserved

Custom Equipment, Unique Electronic Products

Blue Point Engineering

Phone (303) 651-3794 (MST)  
www.BPEsolutions.com